






## N-Channel 40-V (D-S), 175 °C MOSFET, Logic Level

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ ( $\Omega$ )	$I_D$ (A)
40	0.0055 @ $V_{GS} = 10$ V	75 <sup>a</sup>
	0.0065 @ $V_{GS} = 4.5$ V	75 <sup>a</sup>

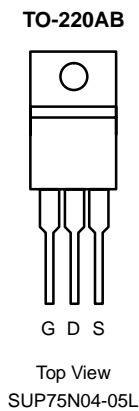

DRAIN connected to TAB

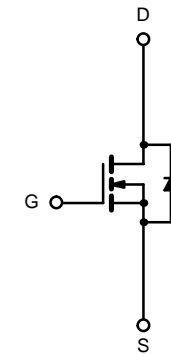

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Limit	Unit
Gate-Source Voltage		$V_{GS}$	$\pm 20$	V
Continuous Drain Current ( $T_J = 175^\circ\text{C}$ )	$T_C = 25^\circ\text{C}$	$I_D$	75 <sup>a</sup>	A
	$T_C = 125^\circ\text{C}$		55	
Pulsed Drain Current		$I_{DM}$	240	
Avalanche Current		$I_{AR}$	75	
Repetitive Avalanche Energy <sup>b</sup>	$L = 0.1$ mH	$E_{AR}$	280	mJ
Power Dissipation	$T_C = 25^\circ\text{C}$ (TO-220AB and TO-263)	$P_D$	250 <sup>c</sup>	W
	$T_A = 25^\circ\text{C}$ (TO-263) <sup>d</sup>		3.7	
Operating Junction and Storage Temperature Range		$T_J, T_{stg}$	-55 to 175	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) <sup>d</sup>	$R_{thJA}$	40	$^\circ\text{C}/\text{W}$
	Free Air (TO-220AB)		62.5	
Junction-to-Case		$R_{thJC}$	0.6	

Notes

- a. Package limited.
- b. Duty cycle  $\leq 1\%$ .
- c. See SOA curve for voltage derating.
- d. When mounted on 1" square PCB (FR-4 material).



SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA	40			V
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA	1.0		3.0	
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ± 20 V			± 100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 40 V, V <sub>GS</sub> = 0 V			1	μA
		V <sub>DS</sub> = 40 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 125 °C			50	
		V <sub>DS</sub> = 40 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 175 °C			250	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> = 5 V, V <sub>GS</sub> = 10 V	120			A
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 75 A		0.0044	0.0055	Ω
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 75 A		0.0054	0.0065	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 30 A, T <sub>J</sub> = 125 °C			0.0091	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 30 A, T <sub>J</sub> = 175 °C			0.011	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 30 A	30			S
<b>Dynamic<sup>b</sup></b>						
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 20 V, f = 1 MHz		6400		pF
Output Capacitance	C <sub>oss</sub>			1700		
Reverse Transfer Capacitance	C <sub>rss</sub>			700		
Total Gate Charge <sup>c</sup>	Q <sub>g</sub>	V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 75 A		130	200	nC
Gate-Source Charge <sup>c</sup>	Q <sub>gs</sub>			20		
Gate-Drain Charge <sup>c</sup>	Q <sub>gd</sub>			30		
Turn-On Delay Time <sup>c</sup>	t <sub>d(on)</sub>	V <sub>DD</sub> = 30 V, R <sub>L</sub> = 0.47 Ω I <sub>D</sub> ≅ 75 A, V <sub>GEN</sub> = 10 V, R <sub>G</sub> = 2.5 Ω		15	30	ns
Rise Time <sup>c</sup>	t <sub>r</sub>			60	120	
Turn-Off Delay Time <sup>c</sup>	t <sub>d(off)</sub>			130	260	
Fall Time <sup>c</sup>	t <sub>f</sub>			70	140	
<b>Source-Drain Diode Ratings and Characteristics (T<sub>C</sub> = 25 °C)<sup>b</sup></b>						
Continuous Current	I <sub>S</sub>				75	A
Pulsed Current	I <sub>SM</sub>				240	
Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>F</sub> = 75 A, V <sub>GS</sub> = 0 V		1.0	1.3	V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> = 75 A, di/dt = 100 A/μs		65	120	ns
Peak Reverse Recovery Current	I <sub>RM(REC)</sub>			4	8	A
Reverse Recovery Charge	Q <sub>rr</sub>			0.13	26	μC


Notes

- a. Pulse test: pulse width ≤ 300 μsec, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.
- c. Independent of operating temperature.




**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**


**Output Characteristics**

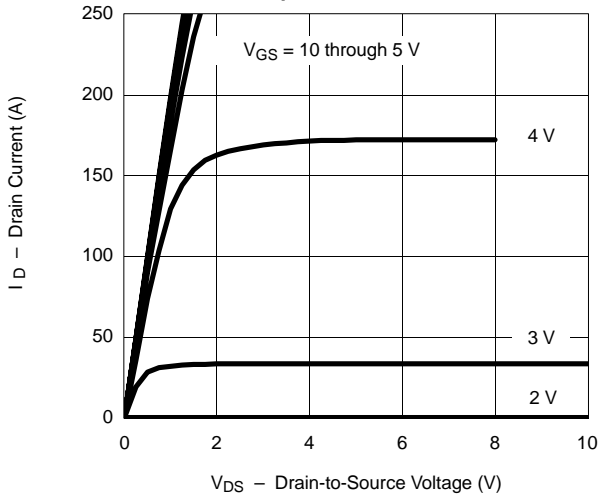


**Transfer Characteristics**

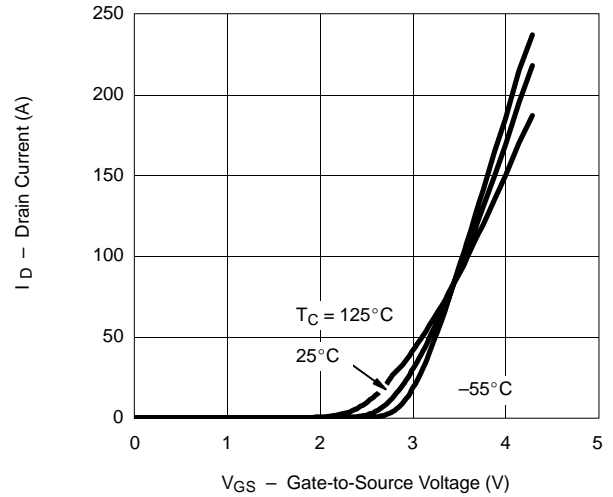


**Transconductance**

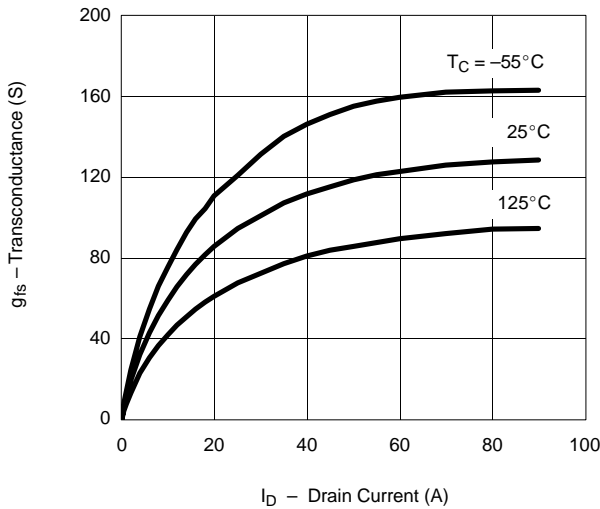


**On-Resistance vs. Drain Current**

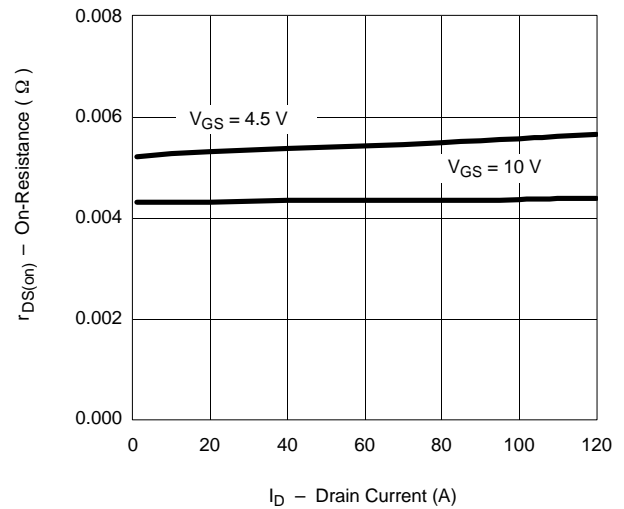



**Capacitance**

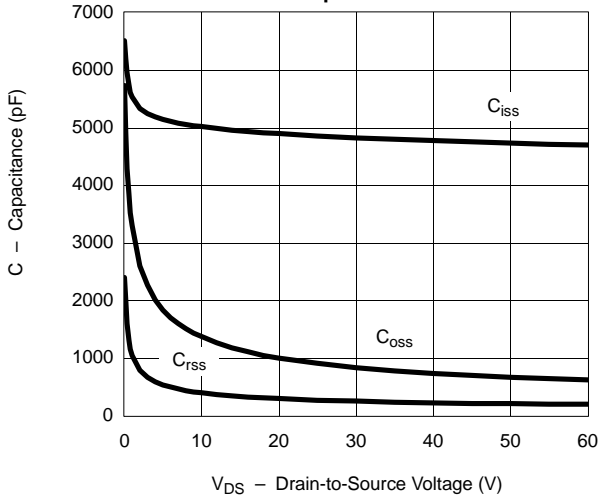




**Gate Charge**

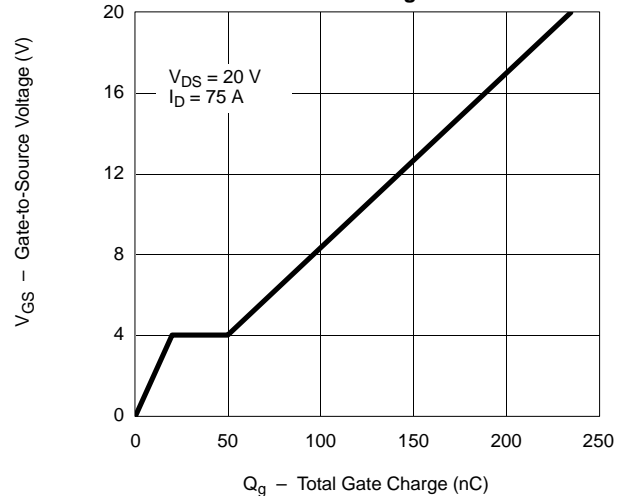

### TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

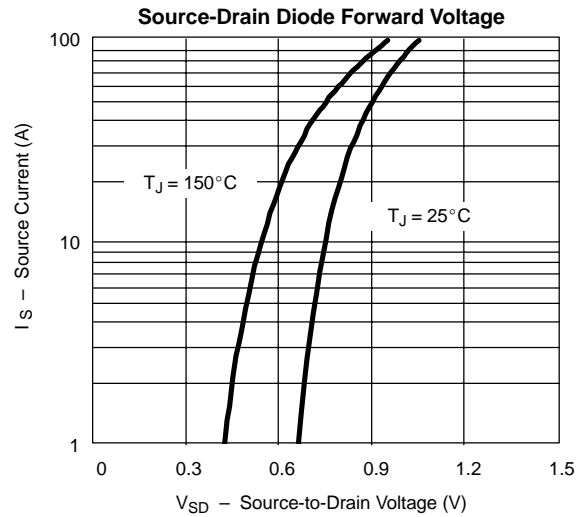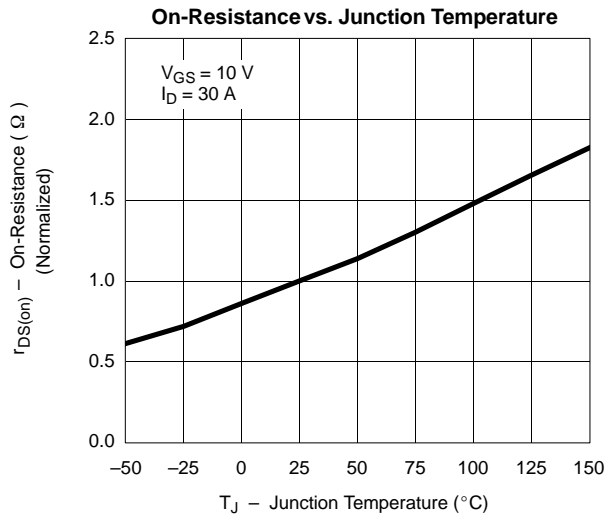

### THERMAL RATINGS

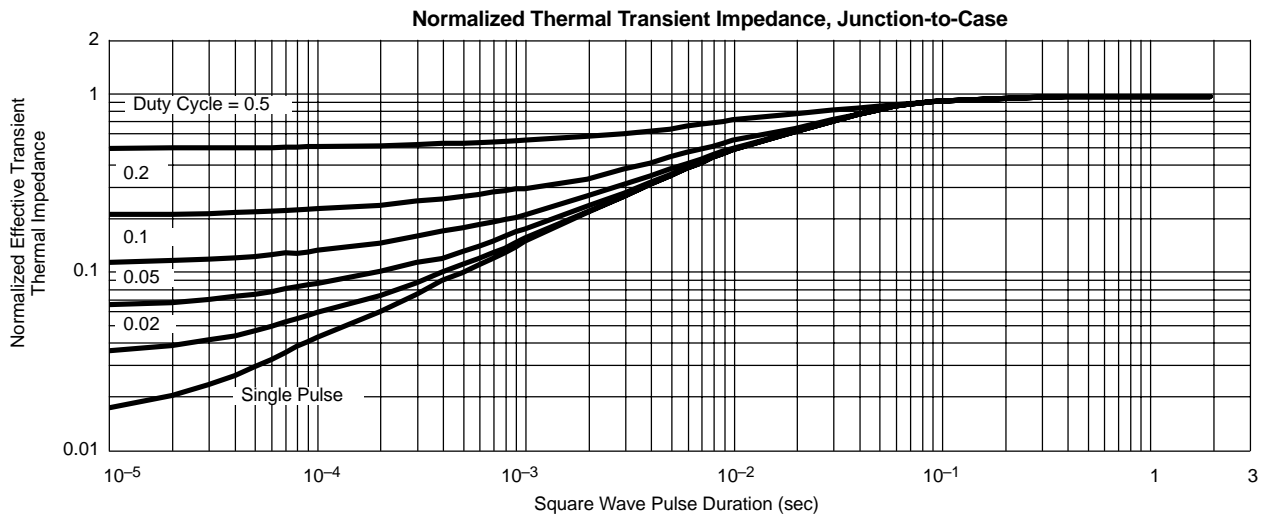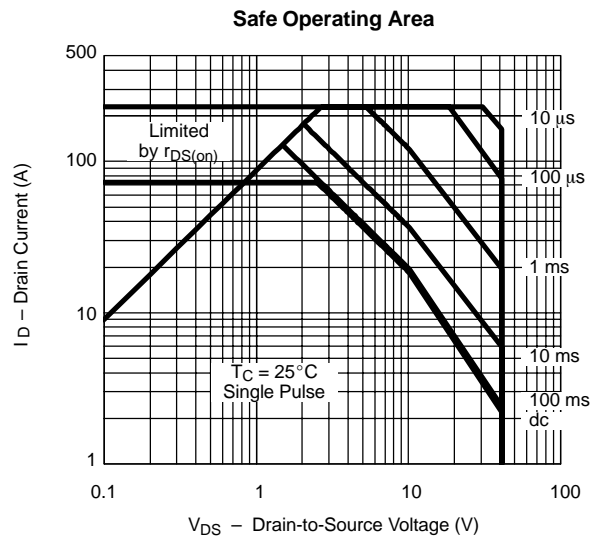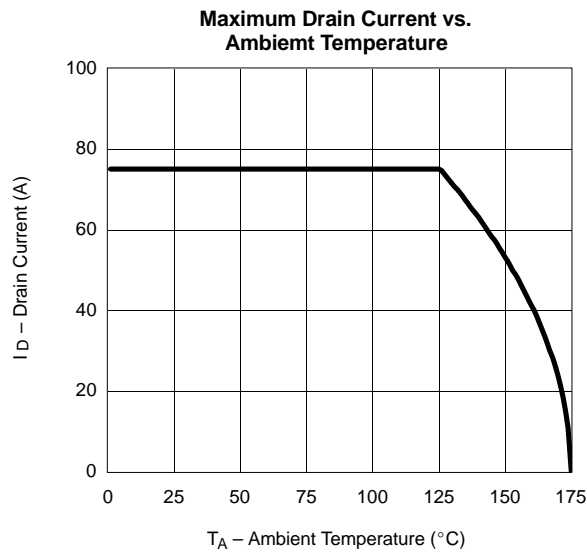

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.